


Molding NO.:	
Molding	P1:241-1
Molding Out	P2:376-1
Molding In	P2:377-1


Rev	Modification Content	Date	Validate
A	the First Edition	2007-06-21	Cindy

**ROHS**

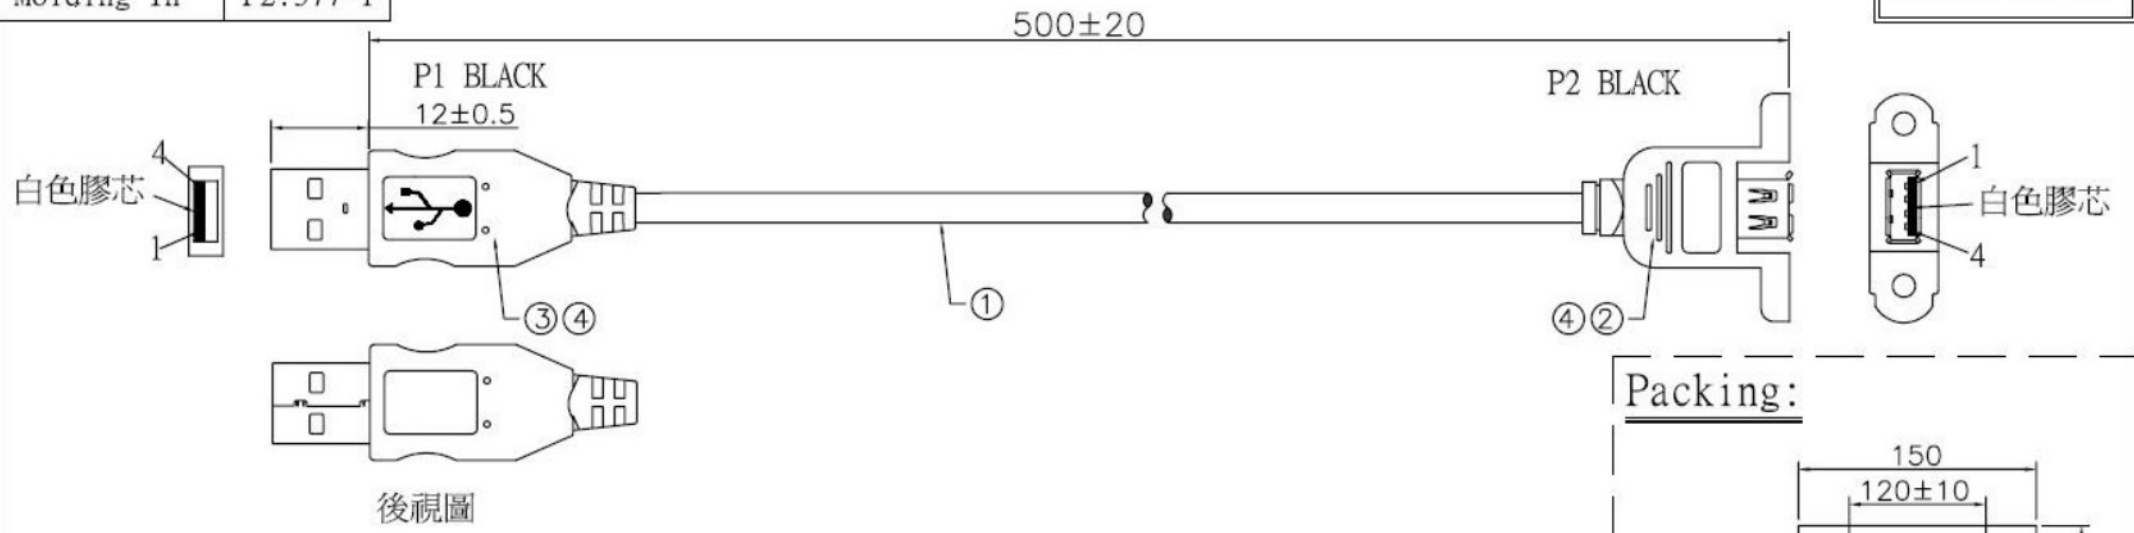

- 測試要求：
1. 成品需做100%電氣測試,不得有任何斷路/短路,錯位,電器閃爍.
  2. 絕緣&導通阻抗:1M Ω /Min& 100Ω /Max .
  3. 包裝方式:單條包裝 (包裝時兩PCS螺絲擰在螺母上).

5	Screw/Nut	Φ3.0*10mm	各2pcs
4	Molding	P1: 50P PVC BLACK P2外模:35P PVC BLACK P2:內模PE料	10 g
3	Connector	USB(A)公 (白膠芯;鍍鎳)	1 pcs
2	Connector	USB(A) 母 (白膠芯;鍍鎳)	1 pcs
1	Cable	UL2725 (REV:2.0) 28AWG*1P+24AWG *2C+AL+D+B(48B) OD:4.5 JACKET: BLACK 1P*28#INSULATION:WHITE /GREEN 2C*24#INSULATION:RED /BLACK L:500mm	1 pcs
NO.	P/N	DESCRIPTION	QTY

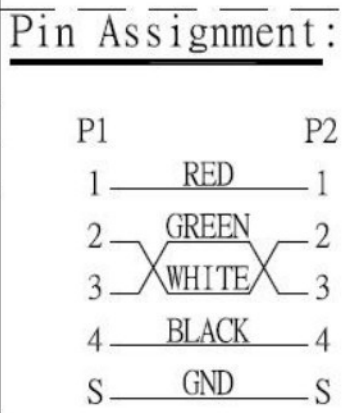

P/N	USBAM-USBAF 全長50CM			
Item	HJ-141-070621-01			
Drawn By	Cindy	Customer NO.	NO	N
Audited By			Unit : mm	
Date	2007-06-21	Rev.: 1.00	ME	