


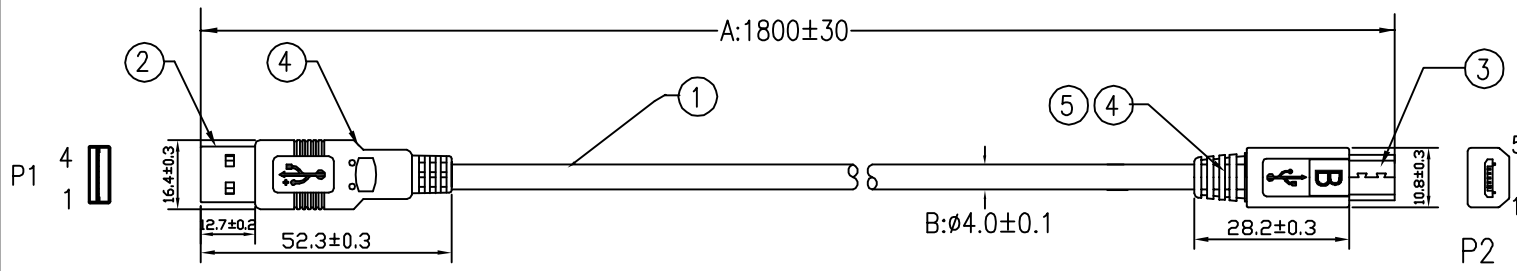
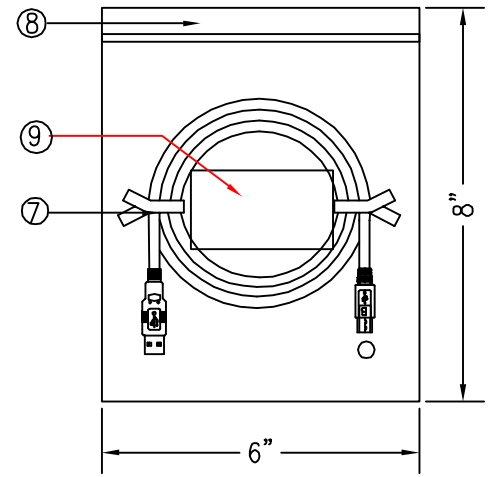


WEIGHT	CUSTOMER NO:	REMARK
51g-K1	US83	Cablematic

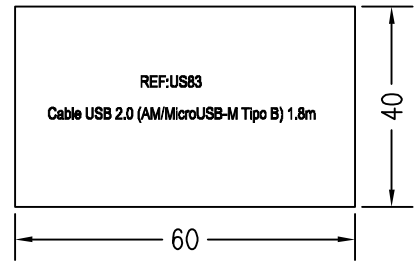

MICROUSB B PLUG

PINOUT:

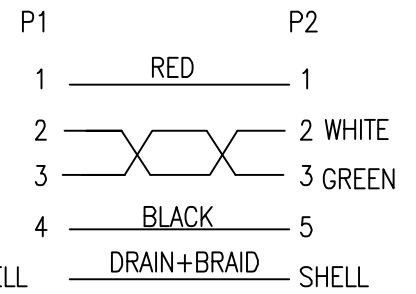

NOTE:

- 1) P1 DIE NO: OU04004
P2 DIE NO: OU04067
- 2) PRIMARY DIM:A
- 3) **RIS Copiat.**
- 4) **FOFE BGLAEL**

5	INNER JACKET:PE (RoHS)
4	OUTER JACKET PVC 45Pa BLACK(1101) (RoHS)
3	MicroUSB B PLUG BLACK TERMINAL PLATED GOLD 30U" SOLDER TYPE (RoHS)
2	USB A TYPE 4P MALE WHITE TERMINAL PLATED GOLD 30U" SOLDER TYPE (RoHS)
1	Micro USB2.0 UL2725 (28#1P+AL)+28#2C+A+D+B(65%) OD:4.0mm BLACK(1101) 1800MM (RoHS)

A	FIRST EDITION	03/08/10										
REV. ECR	DESCRIPTION	C.N. DATE										
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.</small>												
<small>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°</small>		TITLE										
<table border="1"> <tr> <th>DIMENSIONS</th> <th>TOLERANCE</th> </tr> <tr> <td>0.00 TO 30.00mm</td> <td>±0.10mm</td> </tr> <tr> <td>30.01 TO 80.00mm</td> <td>±0.13mm</td> </tr> <tr> <td>80.01 TO 150.00mm</td> <td>±0.15mm</td> </tr> <tr> <td>150.01mm</td> <td>±0.20mm</td> </tr> </table>		DIMENSIONS	TOLERANCE	0.00 TO 30.00mm	±0.10mm	30.01 TO 80.00mm	±0.13mm	80.01 TO 150.00mm	±0.15mm	150.01mm	±0.20mm	MicroUSB B/M TO USB A/ M
DIMENSIONS	TOLERANCE											
0.00 TO 30.00mm	±0.10mm											
30.01 TO 80.00mm	±0.13mm											
80.01 TO 150.00mm	±0.15mm											
150.01mm	±0.20mm											
CHKD.	CONF.	DR. <i>CPM</i>										
PART NO. 2112-1202		APPD.										
MATERIAL	SCALE	SHEET 1/1 UNIT MM SIZE A4 REV. A										
FINISH												