
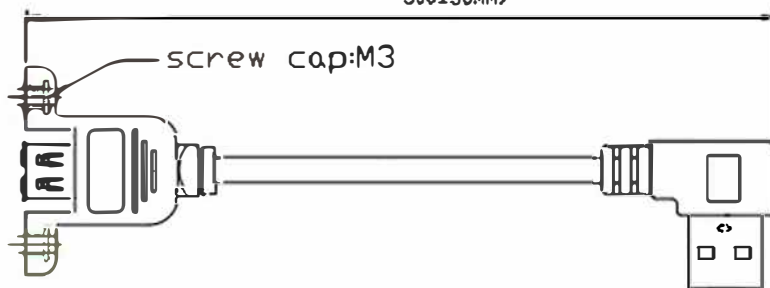



P1


500±30MM

screw cap:M3


P2

PIN ASSIGNMENT:
P1: 1 2 3 4 5 6 7 8 9 **SHIELD**

Red White Green Black Blue White Drain Yellow White Braid

P2: 1 2 3 4 5 6 7 8 9 **SHIELD**


7	PE BAG
6	PCV45Pa Black
5	screw cap:M3
4	screw: M3*10MM
3	USB3.0 AF
2	USB3.0 AM
1	USB3.0 cable 30AWG(7/0.1TC)*1P+24AWG(7/0.2TC)*2C+{30AWG(7/0.1TC)*1P+AL+D(7/0.1TC)}*2P+AL+D+B OD: 4.5mm Black
NL	Material Description

Title:


USB3.0 CABLE AM TO AF

Customer: CABLE MATIC

Customer P/N: UB104

Date: 2020.01.06

Drawing NO.: FUA931



Page: 1/1

REV: A

Unit:

Drawn BY: C

Check BY: D

Appd BY: